




<b>Description:</b>	HOTEL starter set: 2 end post, beam set
<b>Item number:</b>	DFVBD-R-2E
<b>GTIN:</b>	4250912314030
<b>Customs tariff number:</b>	39269097
<b>Material:</b>	Polyethylene
<b>Width (mm):</b>	1755
<b>Height (mm):</b>	706
<b>Depth/Length (mm):</b>	225
<b>Installation width (mm):</b>	1755
<b>Colour:</b>	yellow - black
<b>Foot plate width (mm):</b>	225
<b>Foot plate depth (mm):</b>	225
<b>Foot plate height (mm):</b>	10
<b>Foot plate colour:</b>	black
<b>Area of application:</b>	indoor and outdoor use
<b>Mounting:</b>	bolting
<b>Delivery is:</b>	pre-assembled
<b>Number of mounting holes:</b>	8
<b>Fixing included:</b>	Concrete screw anchors M12 x 80 mm
<b>Tested to withstand force (Joule):</b>	IMPACT ZONE 1: 90° 4.000 J IMPACT ZONE 2: 90° 15.000 J 67,5° 17.600 J 45° 30.000 J 22,5° 102.700 J IMPACT ZONE 3: 90° 4.000 J
<b>Vehicle:</b>	Heavy Duty LPG forklifts
<b>Vehicle weight equivalent (kg):</b>	11.590 kg
<b>Vehicle equivalent speed (km/h):</b>	3,0 km/h
<b>Approval / Certification:</b>	TÜV-GS certified PAS 13: 2017 Kap 7/7.8
<b>Deformation under maximal force (mm):</b>	250
<b>Chemical Resistance:</b>	high-ISO/TR 10358
<b>Temperature Range:</b>	-40° bis +50°
<b>Recyclability:</b>	100%
<b>Warranty:</b>	5 years
<b>Brand:</b>	d-flexx
<b>Contain:</b>	2x DFVBD-E; 1x DFVBD-R



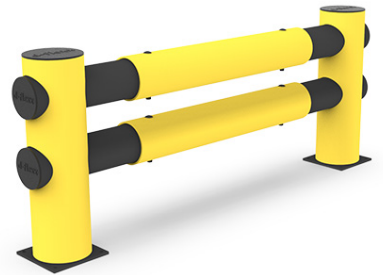

<b>Description:</b>	Traffic barrier double Hotel modular end post
<b>Item number:</b>	DFVBD-E
<b>GTIN:</b>	4250912311541
<b>Customs tariff number:</b>	39269097
<b>Material:</b>	Polyethylene
<b>Width (mm):</b>	619
<b>Height (mm):</b>	705
<b>Depth/Length (mm):</b>	225
<b>Installation width (mm):</b>	419
<b>Net weight (kg):</b>	18,43
<b>Width without foot plate (mm):</b>	619
<b>Depth without foot plate (mm):</b>	200
<b>Colour:</b>	yellow - black
<b>Foot plate width (mm):</b>	225
<b>Foot plate depth (mm):</b>	225
<b>Foot plate height (mm):</b>	10
<b>Foot plate colour:</b>	black
<b>Area of application:</b>	indoor and outdoor use
<b>Mounting:</b>	bolting
<b>Delivery is:</b>	pre-assembled
<b>Number of mounting holes:</b>	4
<b>Fixing included:</b>	Concrete screw anchors M12 x 80 mm
<b>Tested to withstand force (Joule):</b>	IMPACT ZONE 1: 90° 4.000 J
<b>Vehicle:</b>	Heavy Duty LPG forklifts
<b>Vehicle weight equivalent (kg):</b>	11.590 kg
<b>Vehicle equivalent speed (km/h):</b>	3,0 km/h
<b>Approval / Certification:</b>	TÜV-GS certified PAS 13: 2017 Kap 7/7.8
<b>Inclination angle:</b>	15°
<b>Chemical Resistance:</b>	high-ISO/TR 10358
<b>Temperature Range:</b>	-40° bis +50°
<b>Recyclability:</b>	100%
<b>Warranty:</b>	5 years
<b>Brand:</b>	d-flexx

