






Description:	HOTEL extension set: middle post, beam set
Item number:	DFVBD-MS-M
GTIN:	4250912312753
Customs tariff number:	39269097
Material:	Polyethylene
Width (mm):	1700
Height (mm):	705
Depth/Length (mm):	225
Installation width (mm):	1530
Colour:	yellow - black
Foot plate width (mm):	225
Foot plate depth (mm):	225
Foot plate height (mm):	10
Foot plate colour:	black
Area of application:	indoor and outdoor use
Mounting:	bolting
Delivery is:	disassembled
Number of mounting holes:	4
Fixing included:	Concrete screw anchors M12 x 80 mm
Tested to withstand force (Joule):	IMPACT ZONE 1: 90° 4.000 J IMPACT ZONE 2: 90° 15.000 J 67,5° 17.600 J 45° 30.000 J 22,5° 102.700 J IMPACT ZONE 3: 90° 4.000 J
Vehicle:	Heavy Duty LPG forklifts
Vehicle weight equivalent (kg):	11.590 kg
Vehicle equivalent speed (km/h):	3,0 km/h
Approval / Certification:	TÜV-GS certified PAS 13: 2017 Kap 7/7.8
Deformation under maximal force (mm):	250
Chemical Resistance:	high-ISO/TR 10358
Temperature Range:	-40° bis +50°
Recyclability:	100%
Warranty:	5 years
Brand:	d-flexx
Contain:	1x DFVBD-M 1x DFVBD-R



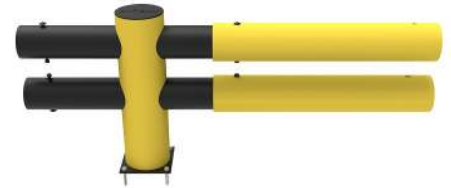


Description:	Barrier double Hotel modular middle post
Item number:	DFVBD-M
GTIN:	4250912311558
Customs tariff number:	39269097
Material:	Polyethylene
Width (mm):	1000
Height (mm):	705
Depth/Length (mm):	225
Installation width (mm):	600
Net weight (kg):	21,21
Width without foot plate (mm):	1000
Depth without foot plate (mm):	200
Colour:	yellow - black
Foot plate width (mm):	225
Foot plate depth (mm):	225
Foot plate height (mm):	10
Foot plate colour:	black
Area of application:	indoor and outdoor use
Mounting:	bolting
Delivery is:	pre-assembled
Number of mounting holes:	4
Fixing included:	Concrete screw anchors M12 x 80 mm
Tested to withstand force (Joule):	IMPACT ZONE 3: 90° 4.000 J
Vehicle:	Heavy Duty LPG forklifts
Vehicle weight equivalent (kg):	11.590 kg
Vehicle equivalent speed (km/h):	3,0 km/h
Approval / Certification:	TÜV-GS certified PAS 13: 2017 Kap 7/7.8
Inclination angle:	15°
Chemical Resistance:	high-ISO/TR 10358
Temperature Range:	-40° bis +50°
Recyclability:	100%
Warranty:	5 years
Brand:	d-flexx





Description:	Traffic barrier double Hotel 2 standard beams
Item number:	DFVBD-R
GTIN:	4250912311565
Customs tariff number:	39269097
Material:	Polyethylene
Width (mm):	930
Diameter (mm):	160
Installation width (mm):	930
Net weight (kg):	3,802
Colour:	yellow
Area of application:	indoor and outdoor use
Mounting:	screw together stuck
Tested to withstand force (Joule):	IMPACT ZONE 2: 90° 15.000 J 67,5° 17.600 J 45° 30.000 J 22,5° 102.700 J
Vehicle:	Heavy Duty LPG forklifts
Vehicle weight equivalent (kg):	11.590 kg
Vehicle equivalent speed (km/h):	3,0 km/h
Approval / Certification:	TÜV-GS certified PAS 13: 2017 Kap 7/7.8
Deformation under maximal force (mm):	250
Chemical Resistance:	high-ISO/TR 10358
Temperature Range:	-40° bis +50°
Recyclability:	100%
Warranty:	5 years
Brand:	d-flexx



Testing Criteria to determine
essential Product Properties:
PAS 13: 2017 sec. 7/7.8

For further information: www.tuv-nord.de